



ROLL-UP DOOR PARTS Catalog



HM Hardware Supply

11313 Surrey Oaks Lane, Houston, Texas 77024

832-551-9956

Email: hmhardwaresupply@yahoo.com



Website: www.hmhardwaresupply.com



INNOVATION
COOPERATION
WIN-WIN



Chain Hoists.....	Page 1
Cast Wheels & Springs	Page 3
Bearings.....	Page 4
End Locks.....	Page 5
End Plates & Shaft Parts.....	Page 6
Roll Up Door Parts.....	Page 8
Spring Boxes.....	Page 9
Locks & Handles.....	Page 10
Seals.....	Page 12
Aluminum Profiles.....	Page 13
Other Parts.....	Page 14
Electric & Automatic Door Motors.....	Page 15
Coils & Panels.....	Page 17

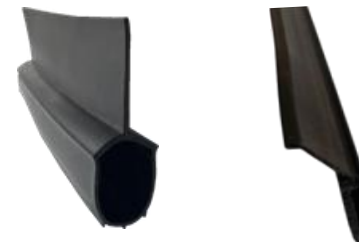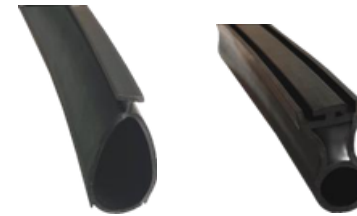

Chain Hoists



Chain Hoist 50B48 Ratio 6:1

Chain Hoist 50B54 Ratio 4.5:1

Chain Hoist 41B36 Ratio 4:1

Chain Hoist 41B48 Ratio 6:1

INCLUDED

1pc sprocket (ID: 1¼",1") with ¼" key way

1pc pulley

1pc roller chain

1pc 23 ft 7.5 inch hand chain

1pc 1/4"key

1pc chain keeper

2pcs screws



**Chain Hoist (Heavy Duty)
Ratio 4:1**

INCLUDED

1pc gear wheel (ID: 1¼",1") with ¼" key way

1pc sprocket

1pc 23 ft 7.5 inch hand chain

1pc chain keeper

2pcs screws

Chain Hoists



Chain Hoist Drive 1 Ratio 4:1

Chain Hoist Drive 2 Ratio 5:1

Chain Hoist Drive 3 Ratio 16:1

Chain Hoist Drive 4 Ratio 20:1

Chain Hoist Drive 5 Ratio 25:1

INCLUDED

1pc gear wheel(ID: 1¼",1") with ¼" key way

1pc sprocket


1pc 23 ft 7.5 inch hand chain

2pcs screws


1pc 1/4" key

1pc chain keeper


**1 set reduction gear, wheel and gear mounts
(Only 16:1 / 20:1 / 25:1) included**

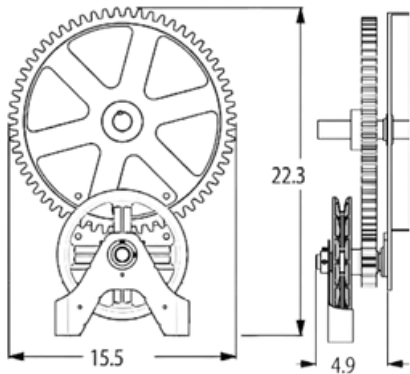


5:1

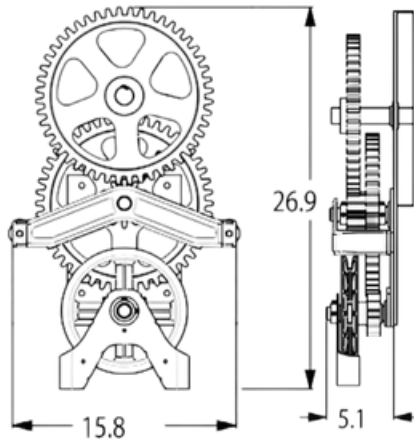

16:1

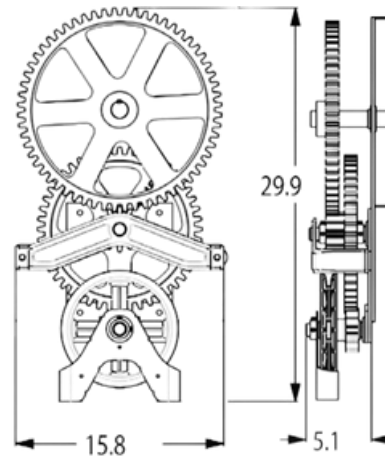

20:1

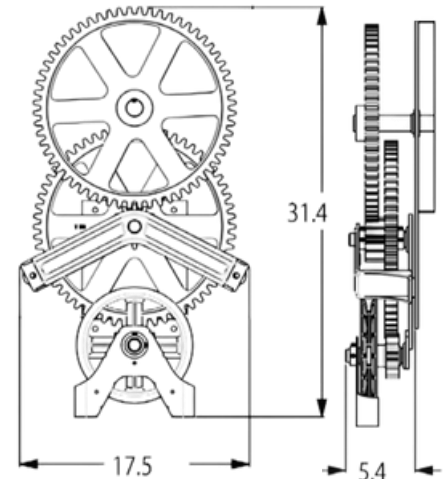

25:1

Cast Wheels & Springs



4" Shaft Collar / Shaft Insert
(ID: 1¼",1")



4" Pipe Collar / Pipe Insert
(ID: 1¼",1")



6" Shaft Collar / Shaft Insert
(ID: 1¼",1½")



6" Pipe Collar / Pipe Insert
(ID: 1¼",1½")



8" Shaft Collar / Shaft Insert
(ID: 1¼",1½")



8" Pipe Collar / Pipe Insert
(ID: 1¼",1½")



Torsion Spring

Material: Carbon Steel

Surface:
Anti-Rust Oil, Electrophoretic, Powder Coated, Electro galvanized

Wire Dia: from 0.125"-0.625"

ID: 1-3/4", 2", 2-5/8", 3-1/2", 3-3/4", 4", 4-1/2", 4-7/8", 4-5/8", 5", 5-1/4", 5-7/8", 6", 6-5/8", 7", 7-1/4", 8-1/2"....

Length: Customizable, max 20 ft

Cast Wheels & Bearings



5" Tension Wheel

ID (1 1/4", 1")
ID is customizable



7" Tension Wheel

ID (1 1/4", 1")
ID is customizable



6.75" Charging Wheel

ID (1 1/4", 1")
ID is customizable



11" Charging Wheel

ID (1 1/4", 1")
ID is customizable



Stamped Flange Bearing - Galvanized

ID	1"	1"	1 1/4"	1 1/4"	1 1/2"
OD	4"	4 1/2"	4 1/2"	6 1/2"	6 1/2"



Stamped Flange Bearing - Black

ID	1"	1 1/4"
OD	4 1/2"	4 1/2"



Cast Flange Bearing

ID	Holes	Distance	Side Length
1"	15/32"	2-3/4"	3-5/8" × 3-5/8"
1-1/4"	9/16"	3-5/8"	4-5/8" × 4-5/8"
1-1/2"	5/8"	4"	5-1/8" × 5-1/8"

End Locks



Curved Nylon End lock

Material: Nylon

Size:3", 4"



Flat Nylon End lock

Material: Nylon



Flat Metal End lock #1

Material: Steel



Curved Metal End lock

Material: Steel

Size:3", 4"



Flat Metal End lock

Material: Steel



Flat Metal Wind lock-M1

Material: Steel



Flat Metal Wind lock-Y

Material: Steel



Curved Iron End lock


Material: Malleable Iron




All end locks or wind locks can be customized based on your slats' measurements



End Plates & Shaft Parts

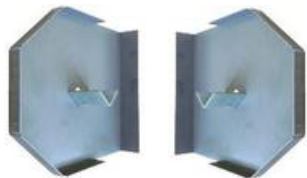

15"x15" Hex End Bracket with Welded Spring Support
3/32" or 1/8" thickness

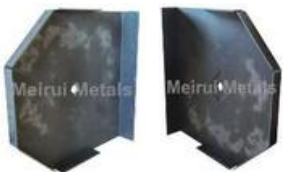

15"x15" Hex End Bracket
3/32" or 1/8" thickness



End Bracket With Cover
3/16" thickness
15x15", 16x16", 17x17", 18x18", 20x20"



End Bracket With Cover
3/16" thickness
15x17", 16x18", 17x19", 18x20", 20x22"



Spring Support
1/8" thickness
3" length



Shaft Support
Fits 60 mm and 76 mm Pipe



Ferrule
1", 1 1/4", 1 1/2"



Solid Shaft
Galvanized or anti-rust oil
Max 20 ft
OD: 1", 1 1/4", 1 1/2"



Spring Pin
10mm x 25mm, 10mm x 63.5mm,
10mm x 76mm.....

Collars & Washers & Stoppers



Shaft with Washer

40mm x 363mm, 40mm x173mm,
40mm x 323mm
Customizable



4" Collar

Anti-rust oil
ID 4 1/2"



6" Collar

Anti rust oil ID 6 1/2"



Round Washer

Customizable

ID	1"	1"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/2"
OD	4"	4 1/4"	4 "	4 1/4"	6"	6 1/4"	6 1/4"



Belmont stopper (R+L)

Galvanized



Stopper (R+L)

Galvanized



Single Stopper

Galvanized



Single Stopper Bar

Galvanized



Chain Keeper

Galvanized

Grille Door Parts




Grille Door Tube

Material: Plastic

ID 8.8mm, OD 11mm, Length 9"

Colors are customizable



Grille Door Tube

Material: Aluminum Surface: Anodized

ID 9.4mm, OD 11mm, Length 9"

Colors are customizable



Grille Door Tube

Material: Stainless Steel

ID 8.6mm, OD 10mm, Length 9"



5/16" Steel Shaft

Max length: 19 ft

Surface: Anti-rust Oil

Sizes are customizable



Aluminum Link-L

Material: Aluminum



Aluminum Link-S

Material: Aluminum



Stainless Steel Link

Material: Stainless Steel



5/16" Push Nuts

Material: 65Mn Steel

Application:



Spring Boxes



Spring Box

Ball: Nylon / Steel / Bearing

ID: 43 / 48 / 50 / 60 /76 mm

OD: 200 / 220 / 240 mm



Spring Box with Screw

Ball: Nylon / Steel / Bearing

ID: 43 / 48 / 50 / 60 /76 mm

OD: 200 / 220 / 240 mm



External Spring Box

Ball: Nylon / Steel / Bearing

ID: 43 / 48 / 50 / 60 /76 mm

OD: 200 / 220 / 240 mm



Spring Steel Band

Thickness: 1.1 / 1.2 / 1.3 / 1.4mm

Width: 45 / 50 / 55 / 60mm

Surface polishing is available



C Hook

Thickness: 1.5mm



S Hook

Thickness: 1.5mm



#90 C Hook

Galvanized



#90 S Hook

Galvanized



Pulley Wheel

OD: 180mm; ID: 43.5mm

Locks



2-7/8" Round Lock

Chrome Finish



2-3/4" / 3-1/8" Disc Padlock

Stainless Steel Shell



2-7/8" Lock Hardware

Galvanized



2-3/4" / 3-1/8" Base & Pin

Galvanized



2-7/8" Lock Hasp-01

Galvanized



2-9/16" Padlock

Chrome Finish



2-7/8" Lock Hasp-02

Galvanized



Ear & Shoe Lock Pin

Galvanized

Locks & Handles



Ground Lock (Square)

Chrome Finish



Ground Lock (Round)

Chrome Finish



Ground Lock

Galvanized



Slide Bolt

Galvanized



Slide Bolt Base (Left & Right)

Galvanized



Rolling Door Center Lock

Galvanized



Galvanized Lifting Handle 1

Galvanized



Galvanized Lifting Handle 2

Galvanized



Galvanized Lifting Handle 3


Galvanized



Rolling Door Track

1-3/4" x 2-3/4", 2.0mm thickness

Seals



Door Brush Seal


Angles: 45, 90, 180
Customizable



Rubber


Width: 7", Thickness: 1.5 mm

;




T Type Bottom Seal

EPDM Rubber
Width: 3",4",5"

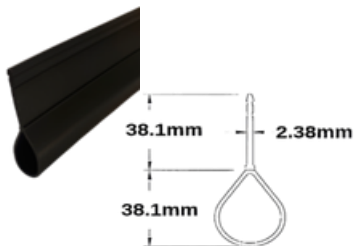


Rolling Door Bottom Seal #1

PVC




Rolling Door Bottom Seal #2

PVC




Rolling Door Bottom Seal #3

PVC

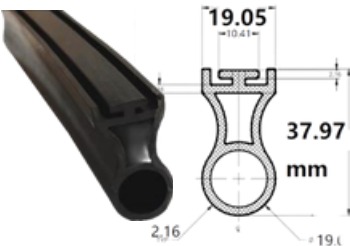

Rolling Door Bottom Seal #4

EPDM Rubber



Side Seal

PVC

Aluminum Profiles



Aluminum Bottom Bar #1

Max Length 20 ft (6 meters)



Aluminum Bottom Bar #2

Max Length 20 ft (6 meters)



Aluminum Bottom Bar #3

Max Length 20 ft (6 meters)



Aluminum Bottom Bar #4

Max Length 20 ft (6 meters)



Aluminum Bottom Bar #5

Max Length 20 ft (6 meters)



Aluminum Bottom Bar #6

Max Length 20 ft (6 meters)



T Aluminum Hook

Max Length 20 ft (6 meters)



S Aluminum Hook

Max Length 20 ft (6 meters)



Aluminum End Cap

Left or Right



Aluminum Track

Max Length 20 ft (6 meters)

Other Parts



Reinforced Cut-off Wheel

4 1/2"x 1/25" x7/8", 7"x 1/16"x 7/8".....



Metal Drill

1/4"(6.3mm), 5/16"(7.9mm),
3/8"(9.5mm).....



Pop Rivet with Aluminum Head/Steel Nail

Material: Aluminum or Steel



Round Rivet

1/4 X 5/16", 1/4 X 7/16".....



Expansion Bolt

Material: Steel



Lag Screw

Material: Steel



Self Drilling Screw

Material: Steel



Carriage Bolt

Material: Steel



Hex Bolt

Material: Steel



WHIZ Nut

Material: Steel



Hex Nut

Material: Steel



Washer

Material: Steel

Electric & Automatic Door Motors



Rolling Door Central Motor 200/60



Rated Voltage: 230V/50Hz or 110V/60Hz

Torque: 120 N·m, 150 N·m, 180 N·m

Tube Diameter: 2-3/8" (60 mm)

Pulley Diameter: 8"-8-5/8" (200-220 mm)

Receiver available

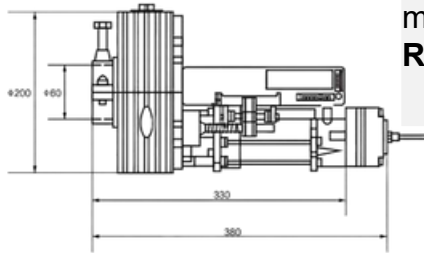


Rolling Door Central Motor 240/76

Rated Voltage: 230V/50Hz or 110V/60Hz

Torque: 360 N·m, 420 N·m

Tube Diameter: 3" (76 mm)

Pulley Diameter: 9-1/2"-10-1/4" (240-260 mm)

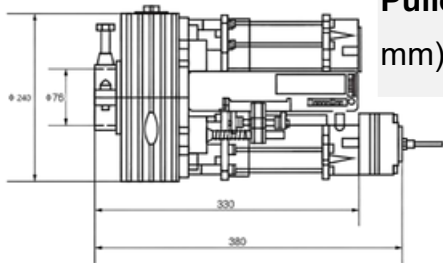

Rolling Door Side Motor

Rated Voltage: 110V / 230V / 380V

Models: DC600, DC800, DC1000

Maximum Lift Height: 20 ft (6 m)

The colors can be customized



Rolling Door Side Motor

Rated Voltage: 110V / 230V / 380V

Models: AC200, AC300, AC400, AC500, AC600, AC800, AC1000, AC1200, AC1300, AC1500, AC2000

Phase: Single-Phase (1P) / Three-Phase (3P)

The colors can be customized

Electric & Automatic Door Systems



Hand Switch

Close-Stop-Open



Key Switch

Close-Open



Europe Key Switch

Close-Open



Motor Lock Box

Three keys



Universal Remote Control #1

America/Mexico

Multiple Frequency 300/310/315/368/
390...MHz



Universal Remote Control #2


America/Mexico

Multiple Frequency 300/310/315/368/
390... MHz



Wireless Keyless Entry Keypad

Compatible with Original Remote
Control-U.S./Mexico market

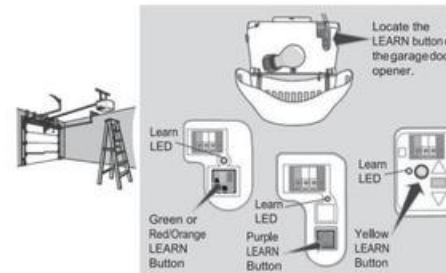

Coils & Panels




Galvanized Steel Coil

Dimensions are customizable



Transparent Polycarbonate Door Panel

Fits 3/8", 1/2", 1/2", and 5/8" Pipe

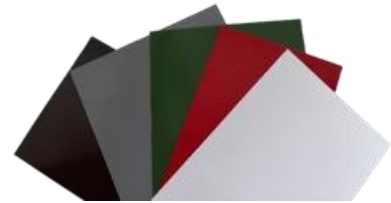


Painted Galvanized Steel Coil

Dimensions are customizable



Rolling Door Vision Panel

Customizable



Perforated Galvanized Steel Coil

Dimensions are customizable

